

4/27/00

A

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
13599

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

INTERNET HOME PAGE DATA ACQUISITION METHOD

and invented by:

Mitsuhiro WatanabeIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 19 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
13599

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 6
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL357932869US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
13599

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☐ Additional Enclosures *(please identify below)*:

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	6	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) Assignment					\$40.00
TOTAL FILING FEE					\$730.00

- ☒ A check in the amount of \$730.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013/SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Signature

Paul J. Esatto, Jr.
Registration No. 30, 749

Dated: April 26, 2000

Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, NY 11530
(516) 742-4343

CC:

Specification
Title of the Invention
Internet Home Page Data Acquisition Method

5 Background of the Invention

The present invention relates to an Internet home page data acquisition method of automatically acquiring browsed Internet home page data, i.e., the hypertext data of WWW (World Wide Web) home pages and, more particularly, to an Internet home page acquisition method which can actually shorten the line connection time in a communication path that occupies a telephone or portable phone line.

Conventionally, acquisition of all Internet home page data has been managed on the client side. Cache management has been performed on the server side as well as on the client side. More specifically, home page data accessed in the past are stored in a cache on the server side to reduce the actual amount of access to the WWW server.

As an example of this technique, a method is disclosed in "Data Transfer System" in Japanese Patent Laid-Open No. 10-21174 (reference 1), which is not limited to a WWW server and designed to suppress an increase in communication time when a client on a LAN (Local Area Network) requests data stored in a data server connected to a WAN (Wide Area Network) and the

requested data is transferred. According to reference 1,
in response to a data request from the client to the
data server, the cache server transfers the requested
data to the client if the data is stored in the cache
server. If the data is not stored in the cache server,
a data request is sent to the data server, and the data
is transferred to the client through the cache server.

In an environment in which a user browses data
in a WWW server by tracing URLs (Uniform Resource
Locators) one by one as in Internet surfing, the method
disclosed in "Internet Home Page Management System",
Japanese Patent Laid-Open No. 10-240604 (reference 2)
has been proposed. According to reference 2, in order
to reduce the amount of access to the network, the WWW
server transmits only a changed portion of home page
data in the WWW server.

As disclosed in "Automatic Hypertext
Acquisition Apparatus", Japanese Patent Laid-Open
No. 10-207759 (reference 3), a method has been proposed,
by which a user can efficiently and automatically
acquire effective pages in a small cache area in a
portable terminal or the like. In the method disclosed
in reference 3, hypertext data are analyzed to trace
links to the original hypertext data in accordance with
the link tags of the hypertext data so as to store, in a
cache, files that are likely to be downloaded, before
the user traces the links, thereby shortening the time

required for connection to the network.

The following problem is, however, posed in the conventional method of managing acquisition of all Internet home page data on the client side.

5 A client uses a method of connecting to URL addresses one by one and accepting data. For this reason, if a WWW server in which a target URL exists is congested, the client has difficulty in accessing the WWW server. In this case, the client keeps waiting for
10 acceptance of home page data until a timeout occurs. If, therefore, the number of congested WWW servers increases, much time is required to sequentially download the home page data of all necessary URL addresses. As a consequence, if connection is made through a telephone
15 line or the like, the occupancy of the line undesirably increases.

 A similar problem arises in the automatic hypertext acquisition apparatus disclosed in reference 3. According to the method disclosed in reference 3, the
20 occupancy of a line can be decreased as compared with the method of making a user obtain target information by tracing hypertext links. If, however, files are downloaded by the method in reference 3, even files that are not necessary for the user are automatically
25 downloaded into the client, resulting in an increase in traffic on the network. For this reason, the load on the server increases because of the processing performed

to shorten the line connection time. This delays a response from the server. As a consequence, the time taken for connection to the network is prolonged.

- Furthermore, since the function of
- 5 transmitting only updated portion of home page data from the WWW server side is lost, the connection time cannot be shortened.

Summary of the Invention

- It is an object of the present invention to
- 10 provided an Internet home page data acquisition method which can shorten the unnecessary wait time in connecting to a WWW server.

- In order to achieve the above object,
- according to the present invention, there is provided an
- 15 Internet home page data acquisition method comprising the steps of transferring an access list held by a client to a cache URL address storage server, acquiring home page data by a cache server on the basis of the transferred access list, and transferring the acquired
- 20 home page data from the cache server to the client upon completion of acquisition of the home page data.

Brief Description of the Drawings

- Fig. 1 is a view showing the arrangement of a network system to which an Internet home page data
- 25 acquisition method according to the first embodiment of the present invention is applied;

Fig. 2 is a view showing the arrangement of a

network system to which an Internet home page data acquisition method according to the second embodiment of the present invention is applied;

Fig. 3 is a block diagram showing the internal arrangement of a cache server in Fig. 2;

Fig. 4 is a block diagram showing the internal arrangement of a cache URL address storage server in Fig. 2;

Fig. 5 is a view showing a folder structure for managing an access list on the client side;

Fig. 6 is a view showing management information on the cache URL address storage server side;

Fig. 7 is a flow chart for explaining the operation of the network system in Fig. 2;

Fig. 8 is a view showing an Internet window to explain how URL addresses are set from a WWW home page according to the third embodiment of the present invention; and

Fig. 9 is a view showing the arrangement of a network system to which an Internet home page acquisition method according to the fourth embodiment of the present invention is applied.

Description of the Preferred Embodiments

The present invention will be described in detail below with reference to the accompanying drawings.

[First Embodiment]

Fig. 1 shows the arrangement of a network system to which an Internet home page data acquisition method according to the present invention is applied, and more specifically, an example of a cyclic data acquisition system.

The network system of this embodiment includes a client 101 as a wire client and a client 102 as a wireless client, which browse home page data, a public network 104 to which the client 101 is connected, a base station 103 for performing radio communication with the client 102, a wireless network 105 to which the base station 103 is connected, an access server 107 for connecting only registered users to an Internet network 111 through the public network 104, and an access server 106 for connecting only registered users to the Internet network 111 through the wireless network 105.

This network system also includes a cache URL address storage server 109 for storing and managing the URL addresses (cache URL addresses) of home pages for which cache requests are received from the client 102, a cache server 110 which is connected to the Internet network 111 to retain retrieved home pages, a local network 108 for networking the access servers 107 and 106, cache server 110, and cache URL address storage server 109, and WWW servers 112, 113, and 114 for storing home page data and distributing the hypertext

contents of the home pages worldwide through the Internet network 111.

Fig. 1 shows only the three WWW servers 112, 113, and 114 for the sake of descriptive convenience, even through countless WWW serves are connected to the Internet network 111.

In this embodiment, to retain desired home page data in the cache server 110, first of all, the users of the clients 101 and 102 create access lists (cyclic lists) of the URL addresses of home pages which the users want to browse.

These access lists are respectively retained in URL list retention folders in the clients 101 and 102. The respective URL list retention folders have their own attributes. Of these folders, one folder in the client 101 and one folder in the client 102 are defined as server storage cyclic folders 101c and 102c, respectively. These server storage cyclic folders 101c and 102c are used to retain access lists (cyclic lists) of URL addresses from which the users want to collectively cache data.

Browsers 101a and 102a in the clients 101 and 102 create list data conforming to the format of the cache URL address storage server 109 on the basis of the access lists retained in the server storage cyclic folders 101c and 102c. The browsers 101a and 102a of the clients 101 and 102 transfer the created access

lists of cache URL addresses to the cache URL address storage server 109 at the time of line connection, and then disconnect the lines.

5 The cache server 110 searches for home pages on the basis of the access lists transferred to the cache URL address storage server 109, and sequentially retains home page data upon finding the target URL addresses. When all the home page data are retained, the cache server 110 connects lines to the clients 101 and 102 and issues data acceptance requests to the clients 101 and 102. Upon reception of the data acceptance requests, the clients 101 and 102 accept the home page data from the cache server 110 and retain them in caches 101b and 102b.

15 According to another method, the clients 101 and 102 periodically check the retained state of cache data in the cache server 110, and accept only cached data. In this case, on the basis of periods of time required for the acquisition of home page data and the like, the cache server 110 notifies the clients 101 and 102 of the times at which data should be accepted. This makes it possible to avoid an unnecessary increase in traffic on the network.

25 The cache server 110 also caches home page data in accordance with requests from the clients 101 and 102. If, therefore, the cache server 110 retains all the home page data requested by the clients 101 and

102 for the same period of time, the memory of the cache server 110 will be wasted.

In order to solve this problem, different data retention times are set in accordance with the numbers of accesses to the respective home pages. In this case, the data of home pages to which larger numbers of accesses are made are retained for longer times. With regard to home pages which are accessed little, the data are discarded when the clients 101 and 102 accept them. This makes it possible to further reduce the traffic on the network.

According to this embodiment, the clients 101 and 102 send access lists of URL addresses of home pages, from which the clients want to accept data, to the cache URL address storage server 109, and the home page data are acquired by the cache server 110, which is always connected to the network, and transferred to the clients 101 and 102. With this operation, the home page data can be acquired in short connection times.

In addition, it suffices if access lists (cyclic lists) of URL addresses to be circulated are stored in folders, in the clients 101 and 102, to which a special meaning like "dedicated to circulation" is assigned. The access lists in the folders are transferred to the cache URL address storage server 109 at the time of line connection. The cache server 110 then acquires home page data on the basis of the

transferred access lists. This makes it possible to shorten the wait time in home page address search operation and the line connection time.

[Second Embodiment]

5 Referring to Fig. 2, reference numeral 201 denotes a client including a browser 201a for browsing home page data and a cache 201b; 202, a local network to which the client 201 is connected; 203, a cache URL address storage server connected to the local network
10 202; 204, a cache server connected to the local network 202; 205, an Internet network to which the cache server 204 is connected; and 206, a WWW server connected to the Internet network 205.

The cache URL address storage server 203
15 causes the cache server 204 to acquire home page data from the WWW server 206 on the basis of an access list (cyclic list) of cache URL addresses transferred from the client 201.

As shown in Fig. 3, the cache server 204
20 includes a target address access rate detecting section 204a for checking the access state of URL addresses to be circulated, an elapsed time measuring section 204b for measuring the retention time of cache data, a home page data cache section 204c for storing acquired home
25 page data, and a cache comparing section 204d for making a comparison to check whether the cached data is the latest data.

As shown in Fig. 4, the cache URL address storage server 203 includes a cyclic URL address accepting unit 203a for accepting cache URL addresses (cyclic URL addresses) requested by a client, a cyclic URL address list retaining section 203b for retaining an accepted access list (cyclic URL address list) of cache URL addresses for each client, and a client ID managing section 203c for checking the ID of each client, managing information for ensuring an area for caching data for each client, and managing a data acceptance requesting method for each client.

An access list of cache URL addresses transferred from the client 201 to the cache URL address storage server 203 is managed in units of folders. Fig. 5 shows the folder structure of an access list.

As shown in Fig. 5, the access list of URL addresses is managed by dividing a folder into a server storage cyclic folder H1 and client storage cyclic folder H2. The access list stored in the server storage cyclic folder H1 is transferred as an access list (cyclic list) of cache URL addresses to the cache URL address storage server 203. For the sake of descriptive convenience, two folders are used in this case, although the number of folders is not limited.

When the cache server 204 is to be caused to actually perform circulation, the address information of the corresponding URL addresses is copied to the server

storage cyclic folder H1. When the client 201 is to be caused to actually perform circulation, the address information of the corresponding URL addresses is copied to the client storage cyclic folder H2.

5 At the time of line connection, the client 201 transfers the address information of "URL11", "URL12", and "URL13" stored in the server storage cyclic folder H1 to the cache URL address storage server 203. Upon reception of this information, the cache URL address
10 storage server 203 prepares for the acquisition of information.

 Fig. 6 shows management information (access list) in the cache URL address storage server 203. The cache URL address storage server 203 manages a cache
15 state for each client.

 Referring to Fig. 2, the Internet network 205 and WWW server 206 are known well by the person skilled in the art, and hence a description of the detailed arrangements will be omitted.

20 The operation of the above network system will be described next with reference to the flow chart of Fig. 7.

 At the time of line connection (step S701), the client 201 connects to the cache URL address storage
25 server 203 (step S702). After connection to the cache URL address storage server 203, the client 201 extracts cache URL addresses to be circulated from the server

storage cyclic folder H1, and transfers them to the
cache URL address storage server 203 (step S703).

Upon completion of the transfer of the URL
addresses, the client 201 temporarily disconnects from
5 the cache URL address storage server 203 (step S704),
and disconnects the line (step S705). The cache server
204 acquires and caches home page data from home pages
at the target URL addresses through the Internet network
205 on the basis of the access list of cache URL
10 addresses stored in the cache URL address storage server
203.

Obviously, data having the same date and size
as those of data existing in the cache server 204 are
regarded as identical data and hence are not acquired
15 from the WWW server 206, and only new data are stored.

If, however, all the data of accessed home
pages are stored, a shortage of memory capacity occurs.
For this reason, the retention time of cache data is
changed in accordance with the access rate of each home
20 page.

The retention period of the data of a home
page with a high access rate is set be longer than that
of the data of a home page with a low access rate. This
makes it possible to efficiently cache data. Note that
25 the access rate of each home page may be calculated on
the basis of the frequency of occurrence of URLs with
which the client 201 requests the acquisition of data.

According to this embodiment, the cache server 204 that is always connected to the Internet has the data acquisition function, and the client 201 requests the cache server 204 through the cache URL address storage server 203 to acquire home page data. When all home page data are acquired, the client 201 accepts the data from the cache server 204. With this operation, the wait time in accessing the WWW server can be shortened, thus shortening the connection time of a telephone line or the like.

In addition, a folder in the client 201 is assigned a special meaning like "dedicated to circulation", and operation is performed according to the meaning assigned to the folder at the time of line connection, thereby easily setting URL addresses to be circulated.

[Third Embodiment]

In the third embodiment, a further improvement is made on the method of transferring URL addresses to a cache URL address storage server 203. More specifically, as shown in Fig. 8, the message "Please input the addresses of home pages that you want to circulate" is displayed on an Internet window on a client 201 to allow the user to set URL addresses on a WWW home page. Note that the basic arrangement of the third embodiment is the same as that of the second embodiment, and hence a description thereof will be omitted.

According to this embodiment, by setting URLs on the home page, the user can set URL addresses by using a general WWW browser without requiring dedicated software for sending cache URL addresses to the cache URL address storage server 203. Note that the method of accepting stored URL data is the same as that used in the second embodiment.

[Fourth Embodiment]

Fig. 9 shows still another embodiment associated with the connection state of clients and cache servers. As shown in Fig. 9, a public network 904 and wireless network 905 respectively have cache servers 909 and 913 separately connected to an Internet network 914. This arrangement makes it possible to transfer data to clients 901 and 902 by methods suitable for the respective networks.

In some case, for example, the client 902 designed to perform radio communication may have difficulty in accepting data depending on the state of a radio channel between the client and a disk unit 903. For this reason, data reduction and the like are executed in the cache server 913. This allows the client 902 to accept data in a shorter period of time than in accessing through the public network 904. In this manner, a data transfer method can be optimized in accordance with a network environment.

Reference numerals 901a and 902a denote

browsers; 901b and 902b, caches; 906 and 910, access servers; 907 and 911, local networks; 908 and 912, cache URL address storage servers; and 915, 916, and 917, WWW servers.

5 As has been described above, according to the present invention, since a cache server that is always connected to the network is made to acquire home page data, the home page data can be acquired in a short connection time. This can shorten the unnecessary wait
10 time when a client connects to a WWW server.

 In addition, since an access list to be transferred to a cache URL address storage server is retained in a server storage cyclic folder in a client, the data to be transferred to the cache URL address
15 storage server are specified. This makes it possible to facilitate circulation.

What is claimed is:

1. An Internet home page data acquisition
2 method comprising the steps of:
3 transferring an access list held by a client
4 to a cache URL address storage server;
5 acquiring home page data by a cache server on
6 the basis of the transferred access list; and
7 transferring the acquired home page data from
8 said cache server to said client upon completion of
9 acquisition of the home page data.
2. A method according to claim 1, wherein
2 said client includes a server storage cyclic
3 folder for storing an access list to be transferred to
4 said cache URL address storage server, and
5 the step of transferring the access list
6 comprises transferring the access list retained in said
7 server storage cyclic folder to said cache URL address
8 storage server.
3. A method according to claim 1, wherein the
2 step of transferring the home page data comprises the
3 steps of:
4 causing said cache server to connect a line to
5 said client when acquisition of home page data is
6 completed; and

7 transferring the acquired home page data from
8 said cache server to said client after the line is
9 connected.

4. A method according to claim 1, wherein the
2 step of transferring the home page data comprises the
3 steps of:

4 causing said client to connect a line to said
5 cache server when acquisition of home page data is
6 completed; and

7 transferring the acquired home page data from
8 said cache server to said client after the line is
9 connected.

5. A method according to claim 4, wherein the
2 step of connecting the line comprises the step of
3 periodically connecting the line to said cache server.

6. A method according to claim 4, wherein
2 the method further comprises the step of
3 causing said cache server to notify said client of an
4 acquisition end time when the access list is transferred,
5 and

6 the step of connecting the line comprises the
7 step of connecting the line to said cache server at the
8 notified acquisition end time.

Abstract of the Disclosure

In an Internet home page data acquisition method, an access list held by a client is transferred to a cache URL address storage server. Home page data is acquired by a cache server on the basis of the
5 transferred access list. The acquired home page data is transferred from the cache server to the client upon completion of acquisition of the home page data.

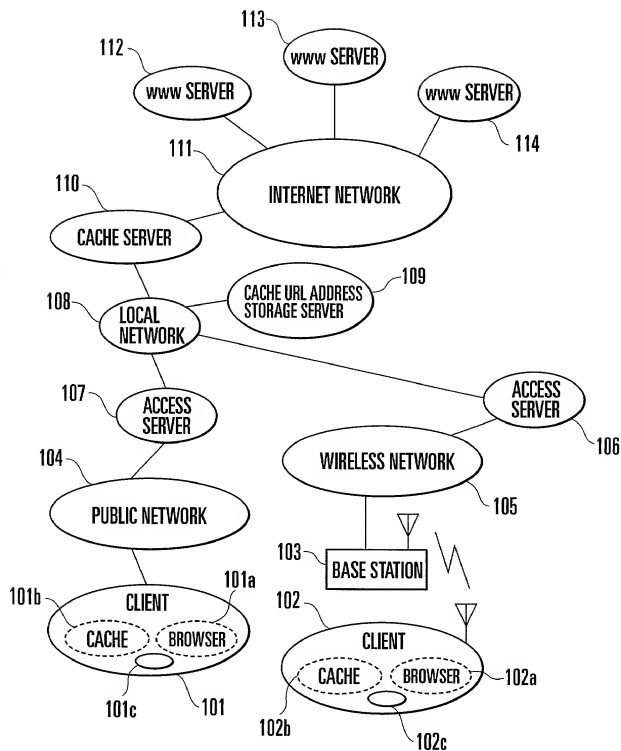


FIG. 1

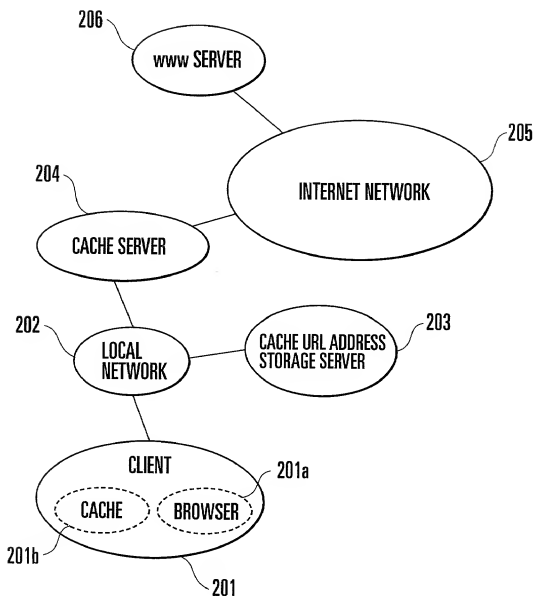


FIG. 2

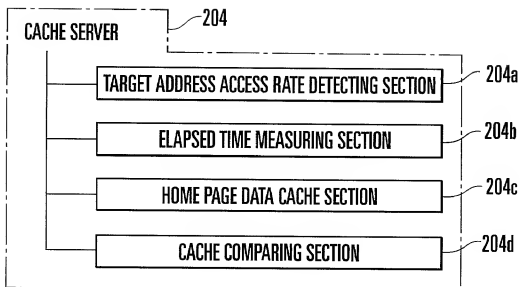


FIG. 3

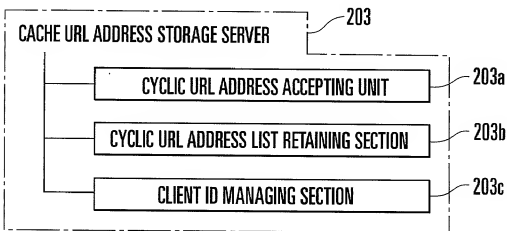


FIG. 4

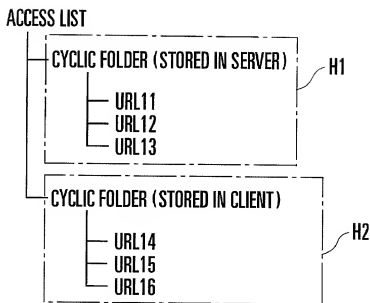


FIG. 5

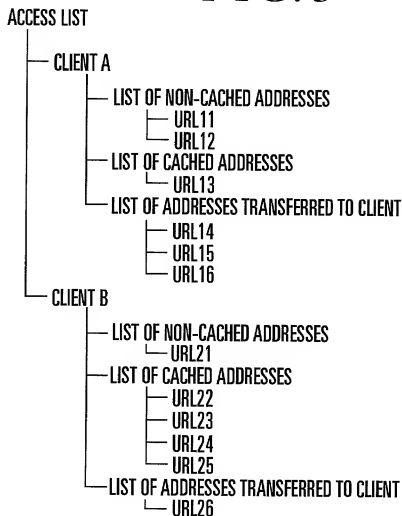


FIG. 6

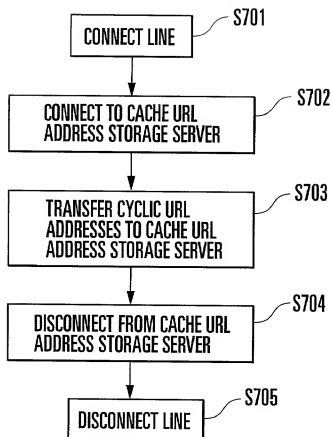


FIG. 7

WELCOME TO HOME PAGE CYCLIC CACHE SERVER

- PLEASE INPUT ADDRESSES OF HOME PAGES YOU WANT TO CIRCULATE

http://www.address1.co.jp/index.htm
 http://www.address2.com/index.html
 http://www.address3.or.jp/url/start.htm

FIG. 8

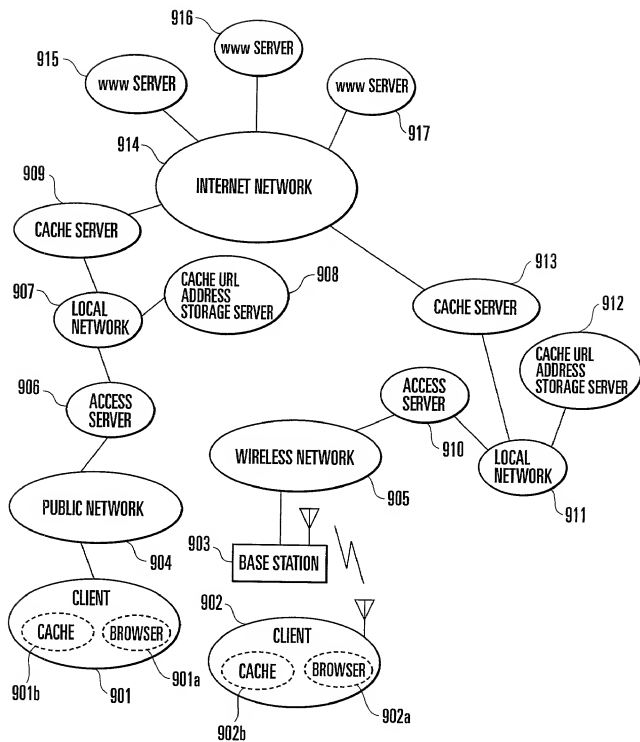


FIG. 9

Docket No. P14046 A

13559

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Internet Home Page Data Acquisition Method

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

124132/1999

(Number)

Japan

(Country)

30/04/1999

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

p14048-A

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

P14046-A

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.
Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530

Direct Telephone Calls to: (name and telephone number)

Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	Mitsuhiro Watanabe	
Sole or first inventor's signature	<i>Mitsuhiro Watanabe</i>	Date Apr. 17, 2000
Residence	Tokyo, Japan	
Citizenship	Japan	
Post Office Address	c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	